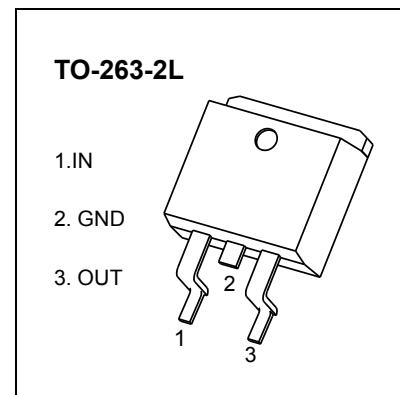


**CJ7806** Three-terminal positive voltage regulator**FEATURES**

- Maximum output current  
 $I_{OM}$ : 1.5 A
- Output voltage  
 $V_O$ : 6V
- Continuous total dissipation  
 $P_D$ : 1.5W ( $T_a = 25^\circ C$ )


**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	66.7	°C/W
Operating Junction Temperature Range	$T_{OPR}$	-25~+125	°C
Storage Temperature Range	$T_{STG}$	-65~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=11V$ ,  $I_o=500mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)







Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	$V_o$	25°C	5.75	6	6.25	V	
		8V≤ $V_i$ ≤21V, $I_o=5mA-1A$	-25-125°C	5.7	6	6.3	V
Load Regulation	$\Delta V_o$	$I_o=5mA-1.5A$	25°C		14	mV	
		$I_o=250mA-750mA$	25°C		4	60	mV
Line regulation	$\Delta V_o$	8V≤ $V_i$ ≤25V	25°C		5	120	mV
		9V≤ $V_i$ ≤13V	25°C		1.5	60	mV
Quiescent Current	$I_q$		25°C		4.3	8	mA
Quiescent Current Change	$\Delta I_q$	8V≤ $V_i$ ≤25V	-25-125°C		1.3	mA	
		5mA≤ $I_o$ ≤1A	-25-125°C		0.5	mA	
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$	0-125°C		-0.8		mV/°C
Output Noise Voltage	$V_N$	10Hz≤f≤100KHz	25°C		45		µV/Vo
Ripple Rejection	$RR$	9V≤ $V_i$ ≤19V, f=120Hz	-25-125°C	59	75		dB
Dropout Voltage	$V_d$	$I_o=1A$	25°C		2		V
Output resistance	$R_o$	f=1KHz	25°C		10		mΩ
Short Circuit Current	$I_{sc}$		25°C		550		mA
Peak Current	$I_{pk}$		25°C		2.2		A

\* Pulse test.

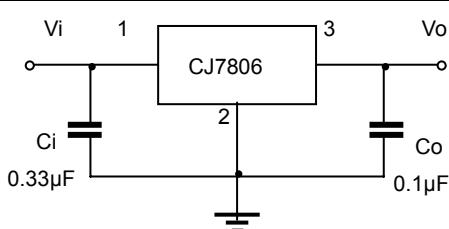
**TYPICAL APPLICATION**

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# Typical Characteristics

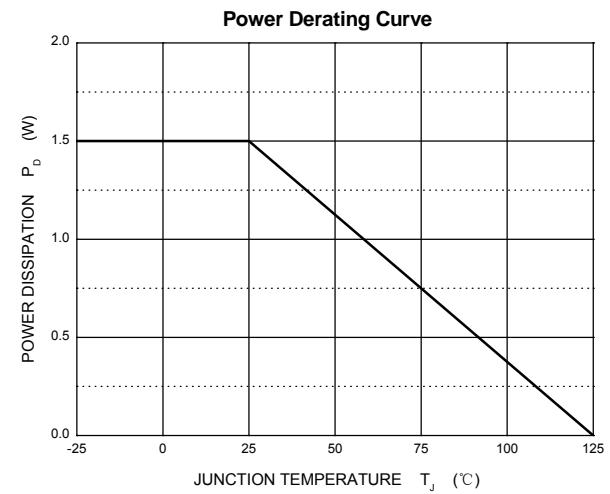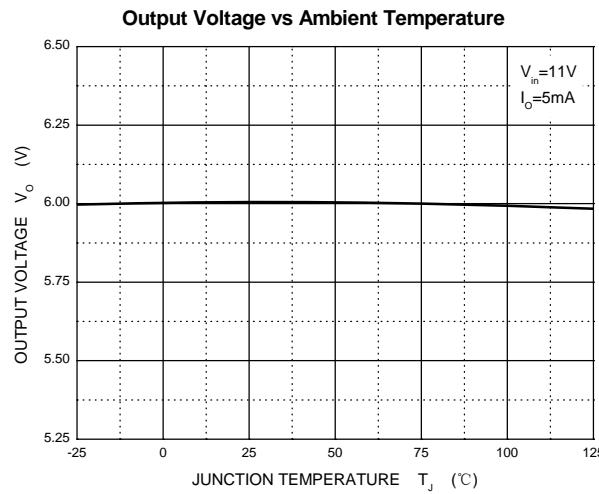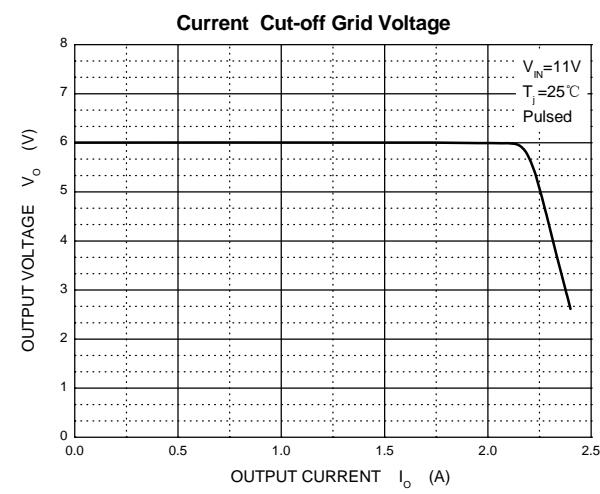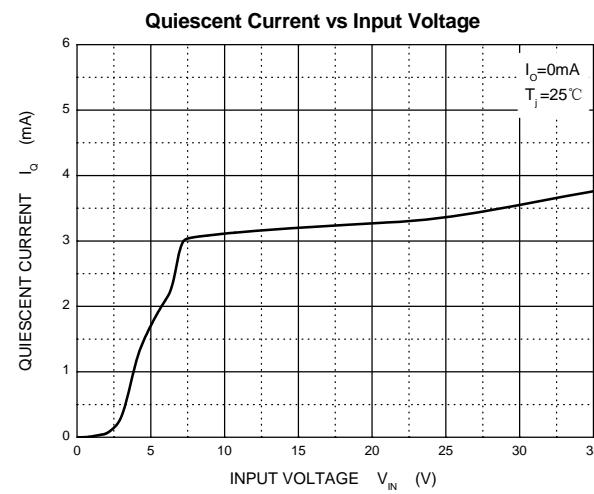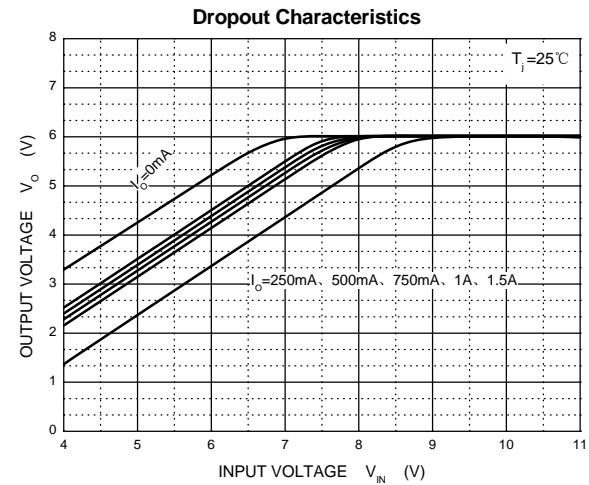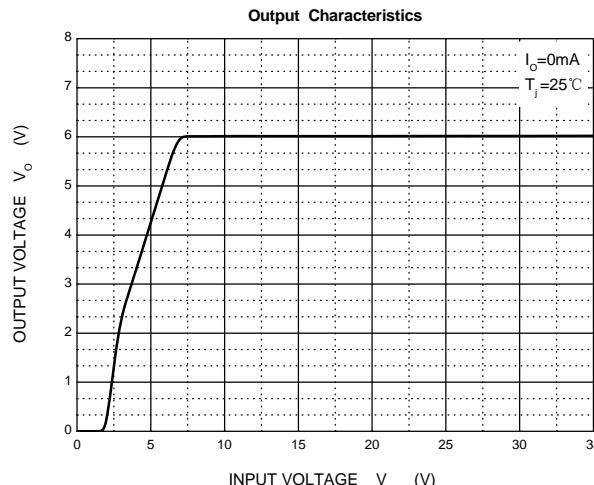


## TO-263-2L Package Outline Dimensions

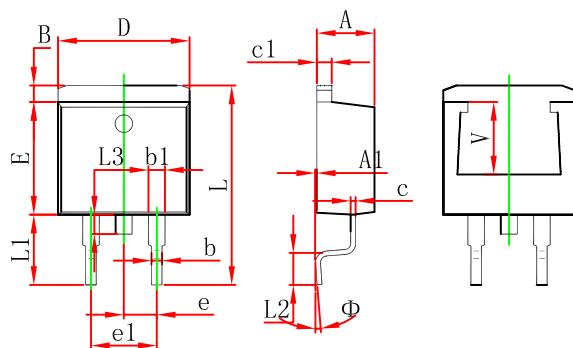

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.120	1.420	0.044	0.056
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
L	14.940	15.500	0.588	0.610
L1	4.950	5.450	0.195	0.215
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
Φ	0°		8°	
V	5.600 REF.		0.220REF.	

## TO-263-2L Suggested Pad Layout

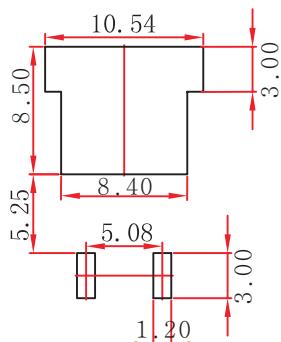


Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

## TO-263-2L Tape and Reel

### TO-263-2L Embossed Carrier Tape

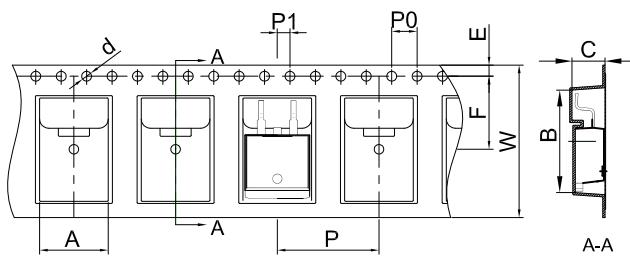


#### Packaging Description:


TO-263-2L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 800 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-263-2L	10.80	16.13	5.21	Ø1.55	1.75	11.50	4.00	16.00	2.00	24.00

### TO-263-2L Tape Leader and Trailer

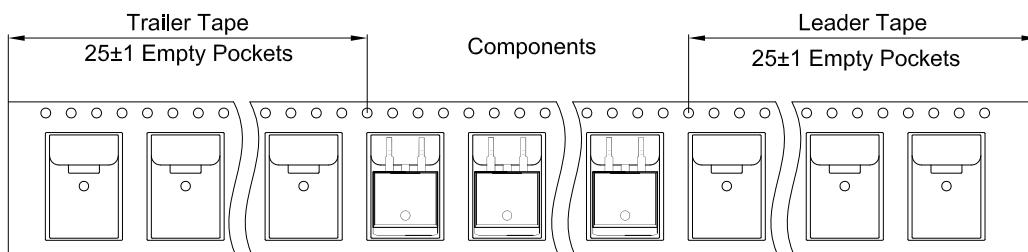

### TO-263-2L Reel

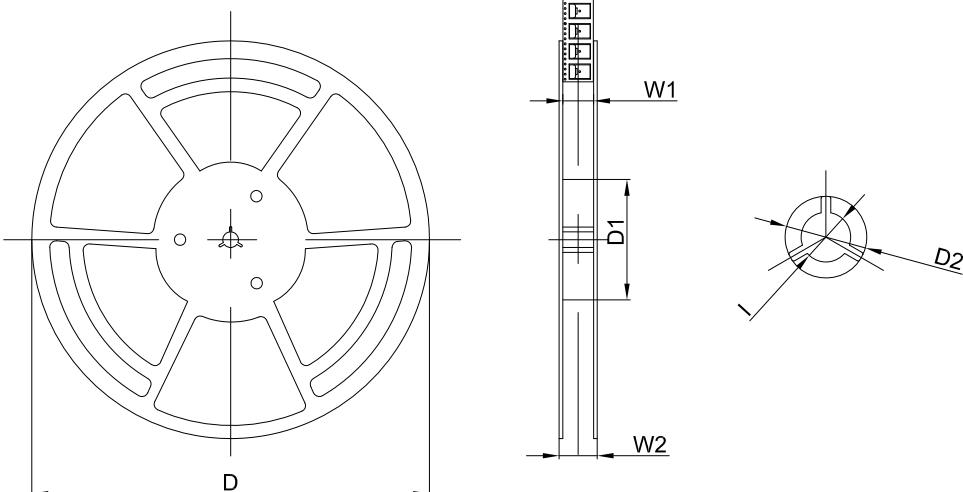

Dimensions are in millimeter					
Reel Option	D	D1	D2	W1	I
13"Dia	Ø330.00	100.00	Ø21.00	24.4	30.4

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
800 pcs	13 inch	800 pcs	340×336×36	8,000 pcs	400×353×365	