

### Description

SMF47xxA Series Zener Diodes are excellent voltage stabilization devices.

The Series is designed specifically for Voltage stabilization, Voltage regulation, and so on.



SOD-123F

### Features

- Glass passivated chip
- Low leakage
- Built-in strain relief
- Low inductance
- High peak reverse power dissipation
- For use in stabilizing and clipping
- with high power rating
- Will not fatigue
- RoHS Compliant

### Mechanical Characteristics


- Package: SOD-123F plastic package.
- Lead Finish: Matte Tin
- Case Material: Epoxy Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020

### Applications

- Voltage stabilization
- Voltage regulation

### Electrical Parameters

Parameter	Definition
$P_D$	Power Dissipation
$I_{ZM}$	Maximum Zener Current
$V_F$	Maximum Forward Voltage
$V_Z$	Zener Voltage
$I_R$	Maximum Reverse Current
$V_R$	Maximum Reverse Voltage

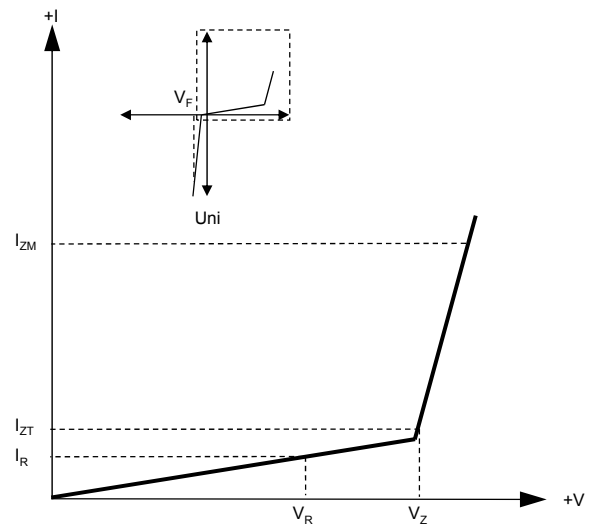

### Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOD-123F	Tape/Reel, 13" reel	10000	EIA-481-1
	Tape/Reel, 7" reel	3000	EIA-481-1

#### Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Units	Remarks
Power Dissipation	$P_D$	1	W	(Note1)
Maximum Forward Voltage	$V_F$	1.2	V	(Note2)
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	100	$^\circ\text{C/W}$	
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	220	$^\circ\text{C/W}$	
Operating Temperature Range	$T_J$	-55 to 150	$^\circ\text{C}$	
Storage Temperature Range	$T_{STG}$	-55 to 150	$^\circ\text{C}$	

Notes1:  $T_L = 50^\circ\text{C}$

Notes2:  $I_F=200\text{mA}$

#### Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Type Number	Marking Code	Zener Voltage			Test Current	Maximum Zener Impedance			Maximum Reverse Current		Maximum Zener Current
		$V_Z @ I_{ZT}$			$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		$I_{ZM}$
		Nom (V)	Min (V)	Max (V)	mA	$\Omega$	$\Omega$	mA	$\mu\text{A}$	V	mA
SMF4733A	733A	5.1	4.8	5.4	49	7	550	1	10	1	178
SMF4734A	734A	5.6	5.3	5.9	45	5	600	1	10	2	162
SMF4735A	735A	6.2	5.8	6.6	41	2	700	1	10	3	146
SMF4736A	736A	6.8	6.4	7.2	37	3.5	700	1	50	4	133
SMF4737A	737A	7.5	7.1	7.9	34	4	700	0.5	50	5	121
SMF4738A	738A	8.2	7.7	8.7	31	4.5	700	0.5	50	6	110
SMF4739A	739A	9.1	8.6	9.6	28	5	700	0.5	50	7	100
SMF4740A	740A	10	9.5	10.5	25	7	700	0.25	50	7.6	91
SMF4741A	741A	11	10.4	11.6	23	8	700	0.25	50	8.4	83
SMF4742A	742A	12	11.4	12.6	21	9	700	0.25	5	9.1	76
SMF4743A	743A	13	12.3	13.7	19	10	700	0.25	5	9.9	69
SMF4744A	744A	15	14.2	15.8	17	14	700	0.25	5	11.4	61
SMF4745A	745A	16	15.2	16.8	15.5	16	700	0.25	5	12.2	57
SMF4746A	746A	18	17.1	18.9	14	20	750	0.25	5	13.7	50
SMF4747A	747A	20	19	21	12.5	22	750	0.25	5	15.2	45
SMF4748A	748A	22	20.9	23.1	11.5	23	750	0.25	5	16.7	41
SMF4749A	749A	24	22.8	25.2	10.5	25	750	0.25	5	18.2	38
SMF4750A	750A	27	25.6	28.4	9.5	35	750	0.25	5	20.6	34
SMF4751A	751A	30	28.5	31.5	8.5	40	1000	0.25	5	22.8	30
SMF4752A	752A	33	31.3	34.7	7.5	45	1000	0.25	5	25.1	27
SMF4753A	753A	36	34.2	37.8	7	50	1000	0.25	5	27.4	25
SMF4754A	754A	39	37	41	6.5	60	1000	0.25	5	29.7	23
SMF4755A	755A	43	40.8	45.2	6	70	1500	0.25	5	32.7	22
SMF4756A	756A	47	44.6	49.4	5.5	80	1500	0.25	5	35.8	19
SMF4757A	757A	51	48.4	53.6	5	95	1500	0.25	5	38.8	18
SMF4758A	758A	56	53.2	58.8	4.5	110	2000	0.25	5	42.6	16
SMF4759A	759A	62	58.9	65.1	4	125	2000	0.25	5	47.1	14
SMF4760A	760A	68	64.6	71.4	3.7	150	2000	0.25	5	51.7	13
SMF4761A	761A	75	71.2	78.8	3.3	175	2000	0.25	5	56	12
SMF4762A	762A	82	77.9	86.1	3	200	3000	0.25	5	62.2	11
SMF4763A	763A	91	86.4	95.6	2.8	250	3000	0.25	5	69.2	10
SMF4764A	764A	100	95	105	2.5	350	3000	0.25	5	76	9

**Rating And Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)**

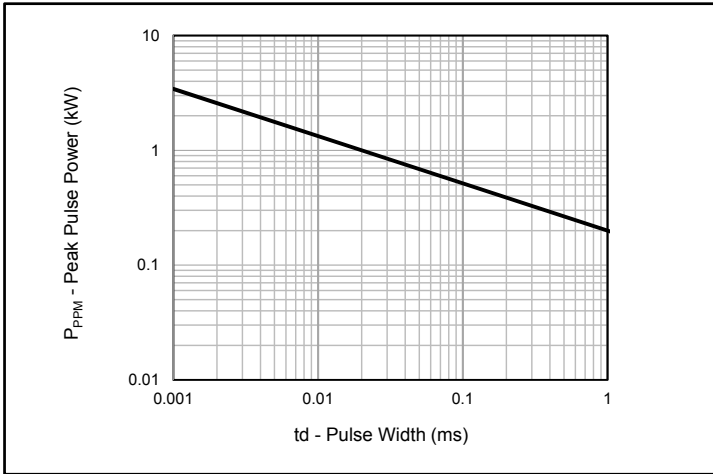


Fig.1 - Peak Pulse Power Rating

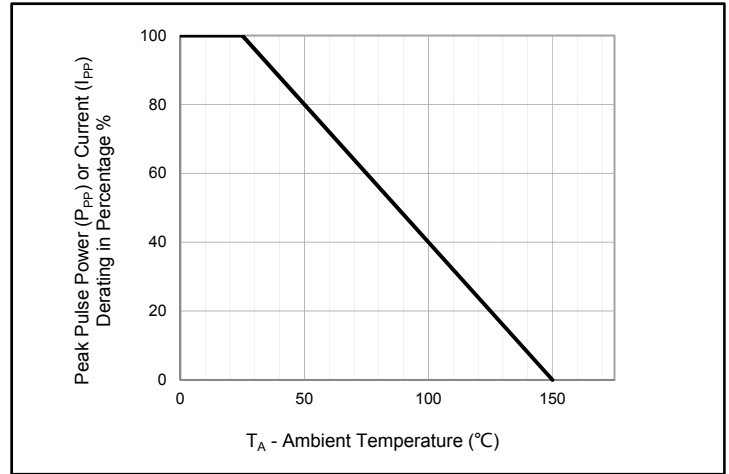


Fig.2 - Pulse Derating Curve

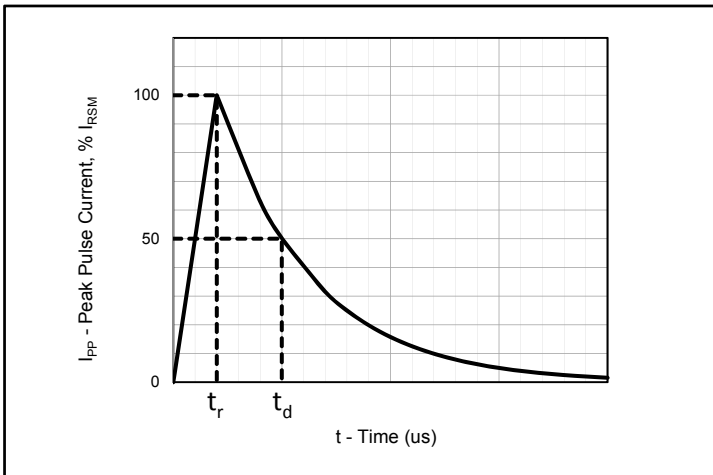


Fig.3 - Pulse Waveform

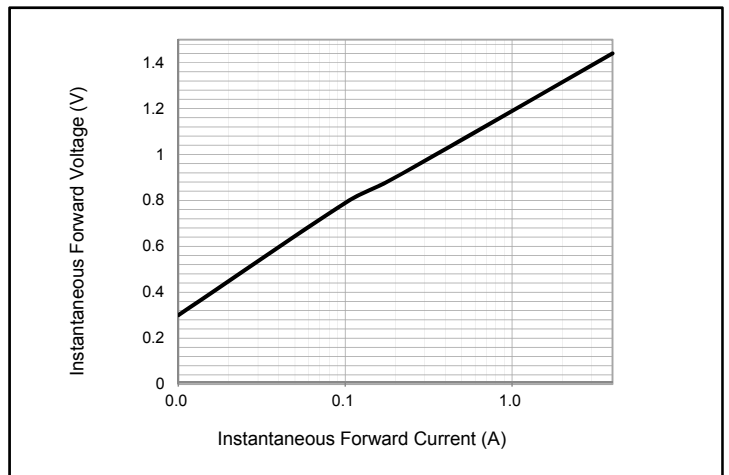


Fig.3 - Typical Instantaneous Forward Characteristics

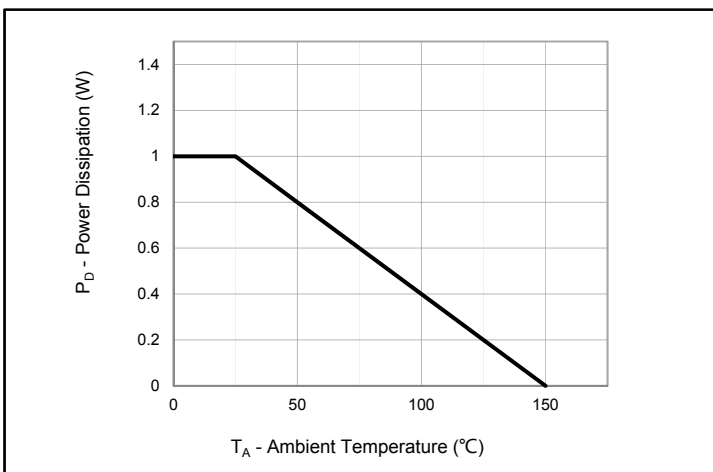


Fig.5 - Power Dissipation Derating Curve


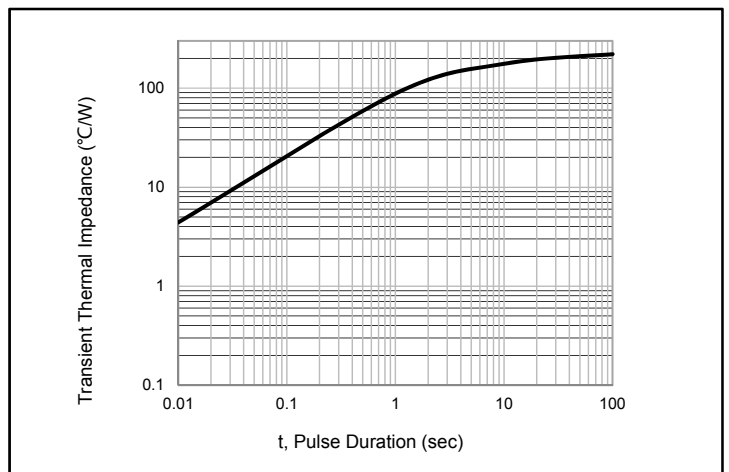



Fig.6 - Typical Transient Thermal Impedance

**Package Dimensions**

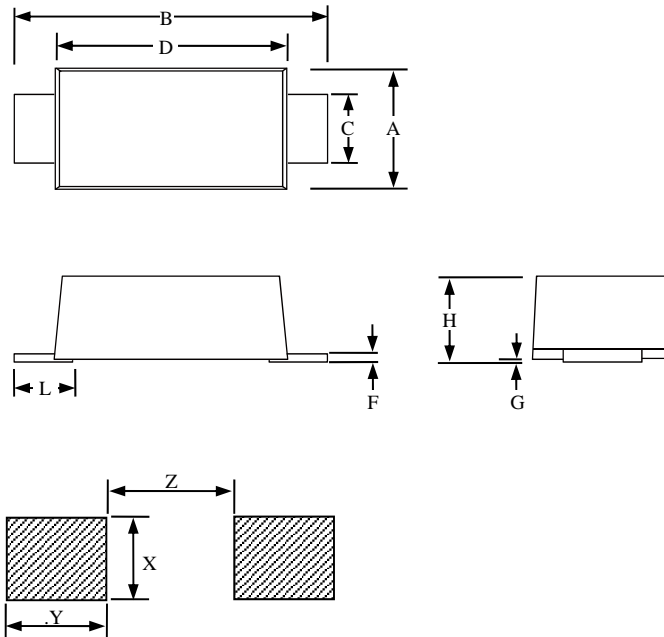


SOD-123F						
Dimension	Inches			Millimeters		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.059		0.079	1.5		2
B	0.134		0.154	3.4		3.9
C	0.028		0.047	0.7		1.2
D	0.098		0.114	2.5		2.9
F	0.002		0.01	0.05		0.26
G	-		0.004	-		0.1
H	0.037		0.053	0.95		1.35
L	0.014		0.035	0.35		0.9
X		0.055			1.4	
Y		0.051			1.3	
Z		0.063			1.6	

### Soldering Parameters

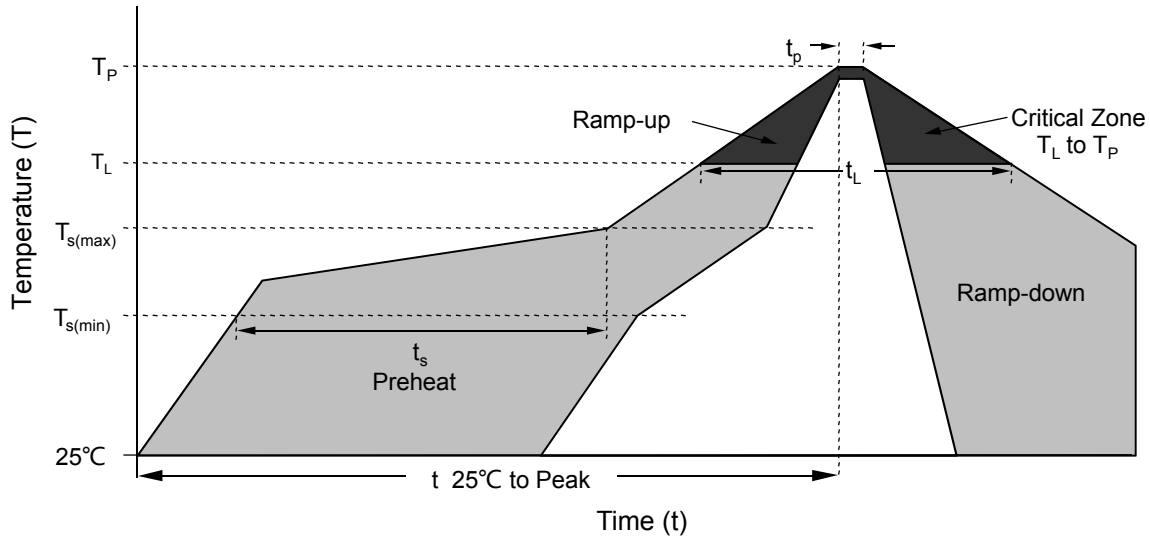

Reflow Condition		Lead-free assembly
Pre Heat	- Temperature Min ( $T_{s(min)}$ )	150°C
	- Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_s$ )	60 – 180 secs
Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak)		3°C/second max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/second max
Reflow	- Temperature ( $T_L$ ) (Liquidus)	217°C
	- Time ( $t_L$ )	60 – 150 secs
Peak Temperature ( $T_P$ )		260 <sup>+0/-5</sup> °C
Time within 5°C of actual peak Temperature ( $t_p$ )		20 – 40 secs
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (t)		8 minutes Max.
Do not exceed		260°C

### Tape and Reel Specification

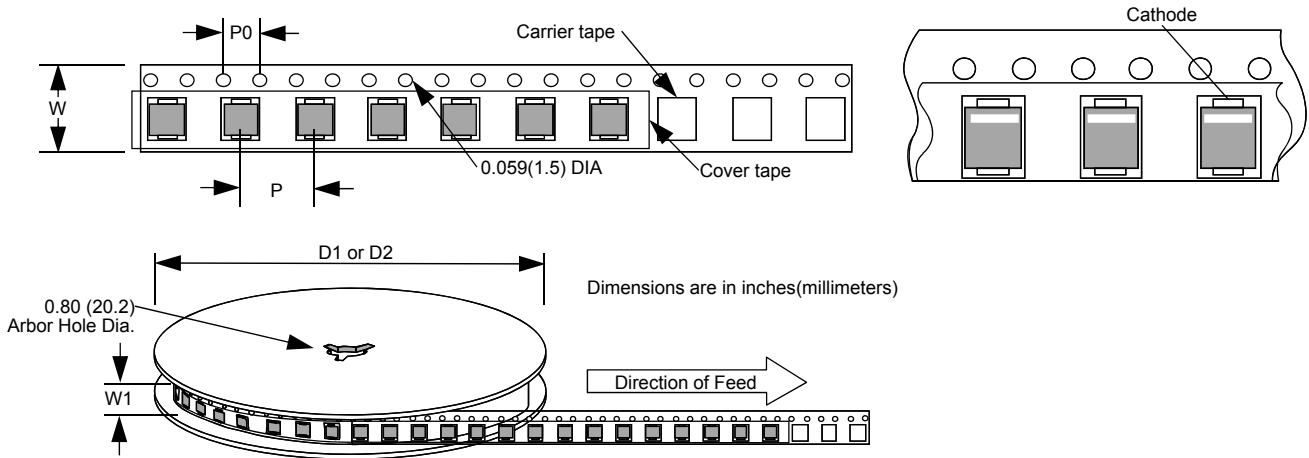

Dimension	Inches			Millimeters		
	MIN	NOM	MAX	MIN	NOM	MAX
P		0.157			4	
P0		0.157			4	
W		0.315			8	
W1		0.374			9.5	
D1		7			177.8	
D2		13			330.2	

### Disclaimer

### Disclaimer

This document is for reference only, data sheet specifications and its information contained are intended to provide a product description only. Weichao Brand. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices). Customers using or selling weichaosemi components for use in such applications do so at their own risk and shall agree to fully indemnify weichaosemi and its subsidiaries harmless against all claims, damages and expenditures.

For additional information, please visit our website <http://www.weichaosemi.com>